THE GOODYEAR TIRE & RUBBER COMPANY

Government Sales Channel

Date: August 18, 2023

Re: Certificates & Licenses (Supplemental Vendor Information Only)

The Goodyear Tire & Rubber Company 200 Innovation Way Akron, OH 44316

Please see attached letter from The Goodyear Tire & Rubber Company certifying that the Goodyear Eagle RS-A, Eagle Enforcer, Eagle Enforcer All Weather, and Eagle Enforcer Winter tires included on the following page are certified for police pursuit use and comply with FMVSS 139.

Also please see attached product one pagers and literature for Goodyear's police, passenger, light truck and medium truck tires. New product information will be sent to the State as becomes available.

Please feel free to contact me with any questions regarding the included attachments at:

Kenny Miller Contract Manager The Goodyear Tire & Rubber Company 200 Innovation Way D/709 Akron, OH 44316-0001

Phone: 330-796-4352 Fax: 330-796-3404

Email: kenneth miller@goodyear.com

The Goodyear Tire & Rubber Company

Akron, Ohio 44316-0001

GOVERNMENT SALES DEPARTMENT

August 1, 2023

The Goodyear Tire & Rubber Company certifies that the Goodyear Eagle RS-A, Eagle Enforcer, Eagle Enforcer All Weather, and Eagle Enforcer Winter tires listed below are certified for police pursuit use and comply with FMVSS 139.

Joe Scalfaro Government Sales Manager Government Sales D/709

Size	<u>Description</u>	Product Code
P225/60R16 97V	Eagle RS-A	732354500
P225/60R16 97V	Eagle RS-A Plus	732354148
P235/55R17 98W	Eagle RS-A	732002500
P235/55R17 98W	Eagle RS-A	732297500
P265/60R17 108V	Eagle RS-A	732523500
P225/60R18 99W	Eagle RS-A	732312500
P235/50R18 99W XL	Eagle RS-A	732276500
245/55R18 103V	Eagle RS-A	732026500
245/55R18 103V	Eagle RS-A	732026500
255/60R18 108V	Eagle Enforcer	732005563
275/55R20 113V	Eagle Enforcer	732010563
265/60R17 108V	Eagle Enforcer All Weather	732001558
225/60R18 100V	Eagle Enforcer All Weather	732003558
245/55R18 103V	Eagle Enforcer All Weather	732004558
255/60R18 108V	Eagle Enforcer All Weather	732005558
235/50R17 96V	Eagle Enforcer All Weather	732008558
225/60R18 100V	Eagle Enforcer Winter	732003567
265/60R17 108H	Eagle Enforcer Winter	732006567
245/55R18 103V	Eagle Enforcer Winter	732004567
255/60R18 108V	Eagle Enforcer Winter	732009563





ENFORCER" FAMILY

EAGLE ENFORCER™ | EAGLE® ENFORCER ALL WEATHER™ |
EAGLE ENFORCER™ WINTER | WRANGLER ENFORCER™ AT

CONFIDENCE FOR THE COMMUNITY

When the call comes, Goodyear® Enforcer tires are ready to respond. Designed for the grueling situations and conditions encountered by law enforcement so they can protect the communities they serve.



ENFORCER™ FAMILY AVAILABLE SIZES

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32nds)	REVS/ MILE	UTQG	OE FITMENT
EAGLE ENFOR	CER™													
255/60R18	108V	SL	VSB	732005563	232702	7.0 - 9.0	7.5	10.2	30.0	2,205	10	696	420 A A	Ford Police Interceptor Utility: 2020+
275/55R20	113V	SL	VSB	732010563	240100	7.5 - 9.5	8.5	10.0	28.6	2,535	11	731	420 A A	
EAGLE® ENFO	RCER ALL WEAT	ΓHER™												
235/50R17	96V	SL	VSB	732008558	237046	6.5 - 8.5	7.5	9.7	26.3	1,565	11	795	500 A A	
265/60R17	108V	SL	VSB	732001558	235372	7.5 - 9.5	8.0	10.7	29.5	2,205	11	795	500 A A	
225/60R18	100V	SL	VSB	732003558	235373	6.0 - 8.0	7.0	9.0	28.6	1,764	11	730	500 A A	
245/55R18	103V	SL	VSB	732004558	235374	7.0 - 8.5	7.5	10.0	28.6	1,929	11	730	500 A A	
255/60R18	108V	SL	VSB	732005558	237047	7.0 - 9.0	7.5	10.2	30.0	2,205	11	696	500 A A	
275/55R20	113V	SL	VSB	732010558	241731	7.5 - 9.5	8.5	10.0	28.6	2,535	11	731	500 A A	
EAGLE ENFOR	CER™ WINTER													
265/60R17	108H	SL	VSB	732006567	237043	7.5 - 9.5	8.0	10.7	29.5	2,205	11	708	500 A A	
225/60R18	100V	SL	VSB	732003567	237041	6.0 - 8.0	6.5	9.a0	28.6	1,764	11	730	500 A A	
245/55R18	103V	SL	VSB	732004567	237042	7.0 - 8.5	7.5	10.0	28.6	1,929	11	730	500 A A	
255/60R18	108V	SL	VSB	732009563	237418	7.0 - 8.5	7.5	10.0	28.6	1,929	11	730	500 A A	
275/55R20	113V	SL	VSB	732010567	241733	7.5 - 9.5	8.5	10.0	28.6	2,535	11	731		
WRANGLER EN	NFORCER™ AT													
LT265/70R18	113H	С	BSL	108028861	240026	7.0 - 9.0	8.0	11.0	32.9	2,535	11	634		Ford F-150 Police Responder 2021+

OTHER PURSUIT TIRES

<u> </u>														
SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32nds)	REVS/ MILE	UTQG	OE FITMENT
EAGLE RS-A®														
P225/60R16	97V	SL	VSB	732354500	103103	6.0 - 8.0	6.5	9.0	26.6	1,609	12	785	260 A A	
P225/60R16	97V	SL	VSB	732354148	175293	6.0 - 8.0	6.5	9.0	26.6	1,609	11	785	340 A A	Ford Crown Victoria Interceptor: 04-05
P235/55R17	98W	SL	VSB	732002500	136360	6.5 - 8.5	8.0	9.7	27.2	1,653	11	769	260 A A	Cadillac Seville STS: 04, Chevrolet Impala/Monte Carlo: 05, Ford Crown Victoria Police: 06-11
P235/55R17	98W	SL	VSB	732297500	218651	6.5 - 8.5	7.5	10.0	27.2	1,653	11	769	260 A A	Chevrolet Impala Police: 12-17
P265/60R17	108V	SL	VSB	732523500	231944	7.0 - 9.5	8.0	11.0	29.5	2,205	11	708	260 A A	Chevrolet Tahoe Police: 17-19
P225/60R18	99W	SL	VSB	732312500	218769	6.0 - 8.0	6.5	9.0	28.6	1,709	11	730	260 A A	Dodge Charger Police: 11-14, Dodge Charger Pursuit: 16+
P235/50R18	99W	XL	VSB	732276500	218197	6.5 - 8.5	7.5	10.0	27.3	1,709	11	766	260 A A	Chevrolet Caprice Police: 11-17
245/55R18	103V	SL	VSB	732026500	222703	7.0 - 8.5	7.0	10.0	28.6	1,929	11	730	260 A A	Ford Police Interceptor Sedan/Utility: 13-19, Dodge Charger Pursuit AWD: 15+
EAGLE® ULTRA	GRIP GW-3™													
P235/55R17	98V	SL	VSB	166579530	198865	6.5 - 8.5	8.0	9.7	27.0	1,653	11	769		
235/50R18	101V	XL	VSB	166041528	220011	6.5 - 8.5	7.5	9.7	27.3	1,819	11	766		
EAGLE® ULTRA	GRIP GW-2™													
P225/60R16	97V	SL	BCS	147354070	118468	6.0 - 8.0	6.5	9.0	26.6	1,609	11	785		

POLICE-TESTED

EAGLE ENFORCER™ / WRANGLER ENFORCER™ AT

- Michigan State Police Vehicle Evaluation (Grattan Raceway)
- Los Angeles County Sheriff Vehicle Evaluation (Auto Club Speedway)
- OEM Approved: Ford Ride and Handling (Michigan and Arizona Proving Grounds)

POPULAR FITMENTS

EAGLE ENFORCER™

• 2020 Ford Police Interceptor Utility

WRANGLER ENFORCER™ AT

• Ford F-150 Police Responder

EAGLE® ENFORCER ALL WEATHER™ The first-ever pursuit-rated all-weather tire

- Michigan State Police Vehicle Evaluation (Grattan Raceway)
- Michigan State Police Vehicle Tire Evaluation (Emergency Vehicle Operator Course)
- Michigan State Police Pursuit-Rated Winter Tire Performance Evaluation (Keweenaw Research Center)

EAGLE® ENFORCER ALL WEATHER™

- Chevrolet Tahoe PPV
- Dodge Charger Pursuit
- Ford Interceptor Sedan
- Ford Interceptor Utility
- Ford Responder Sedan

EAGLE ENFORCER™ WINTER

- Michigan State Police Vehicle Tire Evaluation (Emergency Vehicle Operator Course)
- Michigan State Police Pursuit-Rated Winter Tire Performance Evaluation (Keweenaw Research Center)

EAGLE ENFORCER™ WINTER

- Chevrolet Tahoe PPV
- Dodge Charger Pursuit
- Ford Interceptor Sedan
- Ford Interceptor Utility

FEDERAL QUALIFICATIONS

• CATL-1922 Pursuit and Emergency High Speed

For more complete information, go to Tire-HQ™ at www.tire-hq.com. ©2021 The Goodyear Tire & Rubber Company. All rights reserved.

PLUS-SIZING DISCLAIMER WARNING: Before you replace tires, always consult the vehicle owner's manual and follow the vehicle manufacturer's replacement tire recommendations. Vehicle handling may be significantly affected by a change in tire size or type. When selecting tires that are different from the Original Equipment size, see a professional installer in order to make certain that proper clearance, load-carrying capacity and inflation pressure are selected. Never exceed the maximum load capacity and inflation pressure listed on the sidewall of the tire. Always drive safely and obey all traffic laws. Avoid sudden, sharp turns or lane changes. Failure to follow this warning may result in loss of control of the vehicle, leading to an accident and serious injury or death.







ASSURANCE FAMILY

WEATHERREADY® | COMFORTDRIVE™ | MAXLIFE® | ALL-SEASON

CONTROL YOUR DRIVE

When tackling daily routines, your vehicle needs to be as dependable as you are. More than confident reliability, Goodyear Assurance tires offer the control you demand to take on the day.

#1 BRAND FOR PASSENGER TIRES*



ASSURANCE FAMILY COMPARISON CHART AND AVAILABLE SIZES

ATTRIBUTES ★ = Excels • = Delivers	Wet Traction	Winter Traction	Ride & Handling	Treadwear	# of Sizes	Speed Rating	Rim Sizes	Load Range	Featured Technology
WEATHERREADY®	*	*	•	•	49	T, H, V	15" - 20"	SL, XL	Evolving Traction® Grooves / 3D TredLock® Technology
COMFORTDRIVE™	*	•	*	•	44	H, V	16" - 20"	SL, XL	AquaChannel® Grooves / ComfortFlex™ Technology
MAXLIFE®	•	•	*	*	47	H, V	15" - 20"	SL, XL	TredLife [®] Technology
ALL-SEASON	•	•	•	•	60	T, H, V	14" - 20"	SL	

	WEATHERREADY®	COMFORTDRIVE™	MAXLIFE®	ALL-SEASON		WEATHERREADY®	COMFORTDRIVE™	MAXLIFE®	ALL-SEASON
185/65R14				86T	225/60R17	99H	99H	99H	
185/70R14				88T	225/65R17	102H	102H	102H	102T
175/65R15				84H	235/45R17	97V XL		94V	
185/60R15				84T	235/50R17	96V		96H	
185/65R15				88T	235/55R17	99H	99H	99H	99T
195/60R15				88T	235/60R17	102H	102H	102H	102T
195/65R15	91H		91H	91T	235/65R17	104H	104H	104H	104T
205/60R15				91T	245/45R17		99V XL		
205/65R15				94T	215/55R18	95H	95H	94H	
205/70R15				96T	225/45R18	95V XL	95V XL	91V	
205/75R15				97T	225/50R18		95V		91V
215/70R15				98T	225/55R18	98V	98V	98H	
185/55R16				83H	225/60R18	100H	100H	100H	100H
195/50R16				84V	235/40R18			91V	
195/55R16	87H			87T	235/45R18	94V	94V	94V	94V
205/50R16				87H	235/50R18	97V	97V	97V	
205/55R16	91H	91H	91H	91H	235/55R18	100V	100V	100V	
205/60R16	92V	92V	92V	92T	235/60R18	103H	103V	103V	
205/65R16	95H	95H	95H	95H	235/65R18	106H	106V	106V	106H
215/55R16	97H XL	97H	93H	93H	245/45R18	100V XL	100V XL		96V
215/60R16	95H	95V	95V	95T	245/60R18	105H	105V	105H	105H
215/65R16	98H	98V		98T	255/55R18	109V XL			
215/70R16	100T		100H	100T	255/65R18	111T			
225/55R16				95H	265/60R18	110H		110H	
225/60R16	98H		98H	98T	225/55R19		99V	99V	99V
225/65R16				100T	235/40R19		96V XL	96V XL	
225/70R16	103T			103T	235/45R19	95V	95H	95H	
235/60R16				100T	235/50R19	99V	99V	99V	
235/65R16				103T	235/55R19	101V	101V	101V	101H
235/70R16				106T	245/55R19	103H	103V	103V	103V
205/50R17			89V	89V	255/40R19		100V XL		
215/45R17	87V	87V	87V	87V	255/50R19	107H XL	107V XL		
215/50R17	95V XL	95V	95V XL	91V	255/60R19	109H		108H	
215/55R17	94V	94V	94V	94H	235/55R20	102H	102V	102V	
215/60R17	96H	96H	96H	96T	245/50R20	102H	102V	102V	102H
215/65R17	99H		98H		255/45R20		105V		
225/45R17		91V	91V	91V	255/50R20	109V XL	109V XL	105H	105H
225/50R17	94V	94V	94V	94V	255/55R20	110H XL	107H	107H	
225/55R17	97H	97V	97V	97T					

PLUS-SIZING DISCLAIMER WARNING: Before you replace tires, always consult the vehicle owner's manual and follow the vehicle manufacturer's replacement tire recommendations. Vehicle handling may be significantly affected by a change in tire size or type. When selecting tires that are different from the Original Equipment size, see a professional installer in order to make certain that proper clearance, load-carrying capacity and inflation pressure are selected. Never exceeded the maximum for data capacity and inflation pressure itsed on the sidewall of the tire. Always office safely and obey all traffic laws. Avoid sudden, sharp turns or lane changes. Failure to follow this warning may result in loss of control of the vehicle, leading to an accident and serious injury or death.







WRANGLER FAMILY

MT/R[®] WITH KEVLAR[®] / DURATRAC[®] / TRAILRUNNER AT[®] / ALL-TERRAIN ADVENTURE WITH KEVLAR[®] / FORTITUDE HT[®]

EMPOWER YOUR DRIVE

Because you work hard and play hard, your vehicle needs to be as versatile as you are. More than tackling demanding terrain, Goodyear Wrangler tires offer the capability you need to seize the day.



WRANGLER FAMILY COMPARISON CHART AND AVAILABLE SIZES

ATTRIBUTES ★ = Excels ● = Delivers	Wet Traction	Off-Road Traction	Quiet Ride	Winter Traction	# of Sizes	Speed Rating	Rim Sizes	Load Range	Featured Technology
MT/R® WITH KEVLAR®	*	*			37	P,Q	15" - 20"	C-E	DuPont™ Kevlar® / Durawall® Technology
DURATRAC®	•	*	•	*	48	P,Q,S	15" - 22"	SL, XL, C-F	TractiveGroove Technology®
TRAILRUNNER AT®	•	•	•	LT SIZES	43	R,S,T	15" - 22"	SL, C, E	<
ALL-TERRAIN ADVENTURE WITH KEVLAR®	*	•	*	LT SIZES	46	R,S,T	15" - 20"	SL, C, E	DuPont [™] Kevlar® / Durawall® Technology
FORTITUDE	*		*	•	42	R,T	15" - 22"	SL, XL, D, E	

	MT/R WITH KEVLAR®	DURATRAC	TRAILRUNNER at	ALL-TERRAIN ADVENTURE WITH KEVLAR®	FORTITUDE HT		MT/R WITH KEVLAR®	DURATRAC	TRAILRUNNER at	ALL-TERRAIN ADVENTURE WITH KEVLAR®	FORTITUDE HT
225/75R15			102T			LT315/70R17	D	D			
235/75R15			105S		105T	33X10.50R17LT	D				
LT235/75R15		С				35X12.50R17LT	С	E			
30X9.50R15LT						37X12.50R17LT	D				
32X11.50R15LT	С					38X14.50R17LT	D				
35X12.50R15LT	С					40X13.50R17LT	С				
31X10.50R15LT	С	С	C	C		42X14.50R17LT	С				
33X12.50R15LT	С	С				235/60R18			103T		
225/75R16			104S		104T	245/60R18			105T		105T
235/70R16			106T	106T	106T	255/65R18				111T	111T
235/75R16					112T	255/70R18		1138	113T	116H	113T
245/70R16			107T	107T	107T	265/60R18		1108	110T	110T	110T
245/75R16			1118	111T	111T	265/65R18		114S	114T	114T	112T, 114T
255/70R16		1118	1118	111T		265/70R18			116T	116T	116T
265/70R16		1128	112T	112T	112T	275/65R18		1168	116T	116T	116T
265/75R16			116T	116T	116T	LT265/70R18			E	E	
LT215/85R16		E	E	E		LT275/65R18	С	C, E	E	C, E	
LT225/75R16		E	E	E	E	LT275/70R18	E	E	E	E	
LT235/85R16	E	E	E	E		LT285/65R18		D, E		E	
LT245/75R16	E	C, E	E	E	E	LT285/75R18	E	E			
LT265/75R16	E	C, E	E	E	E	LT295/65R18		E			
LT285/75R16	E	E	E	E		LT295/70R18	E	E			
LT305/70R16	E					LT325/65R18		E			
LT315/75R16	D	E				33X10.50R18LT	D				
225/65R17			102T		102H	35X12.50R18LT	E	D, E, F			
235/65R17			104T		104T	37X13.50R18LT	D				
235/70R17			109T	109T	109T	255/55R19		111Q			
235/75R17				109T	109T	255/60R19				109T	
245/65R17			107T	107T	107T	255/65R19				114H	
245/70R17		110S	110T	110T	110T	255/55R20		110Q			
245/75R17				112T		255/60R20				113H	
255/65R17				110T	110T	265/50R20				107T	
255/70R17			112T	112T	112T	275/55R20		113S, T	113T	113T	
255/75R17		115S				275/60R20		1158	1158	115T	
265/65R17		112S	112T	112T	112T	LT265/60R20				E	
265/70R17		1158	115T	115T	115T	LT275/65R20	E	E	E	E	
LT235/80R17		E	E	E		LT285/55R20				E	
LT245/70R17	E	E	E	E	Е	LT285/60R20		E		E	
LT245/75R17	E	Е	E	E		LT285/65R20	E				
LT255/75R17	C					LT305/55R20		E		E	
LT265/70R17	E	C, E	E	E	Е	LT325/60R20		E			
LT275/70R17	E	-, -	-		-	33X12.50R20LT	E	E			
LT275/80R17	D					35X12.50R20LT	E	E,F			
LT285/70R17	D	C, D, E	E	E		37X12.50R20LT	E	F F			
LT295/70R17		E	_	-		285/45R22	-	•	114T		114H
LT305/70R17	D	_				37X13.50R22LT		F	7771		22111
LISUS//UN1/	υ					J/AIJ.JUNZZLI		Г			

PLUS-SIZING DISCLAIMER WARNING: Before you replace tires, always consult the vehicle owner's manual and follow the vehicle manufacturer's replacement tire recommendations. Vehicle handling may be significantly affected by a change in tire size or type. When selecting tires that are different from the Original Equipment size, see a professional installer in order to make certain that proper clearance, load-carrying capacity and inflation pressure is eselected. Never exceed the maximum load capacity and inflation pressure listed on the sidewall of the tire. Always drive safely and obey all traffic laws. Avoid sudden, sharp turns or lane changes. Failure to follow this warning may result in loss of control of the vehicle, leading to an accident and serious injury or death.





WRANGLER® WORKHORSE® AT

THE TOUGHNESS TO TAME THE TERRAIN

VERSATILITY YOU CAN COUNT ON

Do even more with dependable traction on-road, through wet, over gravel, dirt, and even snow.

RUGGED FOR THE ROAD AHEAD

Go where work takes you, thanks to a tread compound built to handle tough conditions while resisting chipping and chunking.

WEATHER THE STORM

Handle the demands of the job, even in deep snow, with a tire that has the three-peak mountain snowflake designation.

OVERCOME THE CONDITIONS

When facing tough jobs, count on a tough tread with large blocks and open grooves that dig in and help you make it through the day.







WRANGLER® WORKHORSE® AT AVAILABLE SIZES

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	POPULAR FITMENTS IN THIS SIZE
225/65R17	102T	SL	0WL	480757856	240560	6.0 - 8.0	6.50	9	28.5	1874	12	733	580 B B	Escape, Terrain, CR-V, Rogue, Outback, RAV4
225/75R16	104S	SL	OWL	480129856	240873	6.0 - 7.5	6.00	8.8	29.3	1984	12	713	580 B B	Wrangler, Liberty, Grand Cherokee
235/60R18	103T	SL	BSL	480250855	240842	6.5 - 8.5	7.00	9.45	29.1	1929	12	718	580 B B	RDX, CR-V, Santa Fe, Sorento
235/65R16C	121R	E	BSL	481195855	243461	6.5 - 8.5	7.00	9.5	28.0	3195	11	743		Transit
235/65R17	104T	SL	BSL	480996855	240841	6.5 - 8.5	7.00	9.45	29.1	1984	12	719	580 B B	X5, Edge, CR-V, Santa Fe, Grand Cherokee, Sorento
235/70R16	106T	SL	OWL	480043856	240558	6.0 - 8.0	7.00	9.4	29.0	2094	12	721	580 B B	Explorer, Escape, Pilot, Liberty
235/70R17	109T	XL	BSL	480078855	240843	6.0 - 8.0	7.00	9.4	30.0	2271	12	697	580 B B	F-150
245/60R18	105T	SL	BSL	480001855	240846	7.0 - 8.5	7.00	9.7	29.6	2039	12	707	580 B B	MDX, Edge, Explorer, Ridgeline, Pilot, Highlander
245/65R17	107T	SL	BSL	480592855	240844	7.0 - 8.5	7.00	9.8	29.5	2149	12	708	580 B B	Trailblazer, Explorer, Ridgeline, Pilot, Grand Cherokee, Highlander
245/70R16	107T	SL	OWL	480762856	240845	6.5 - 8.0	7.00	9.8	29.5	2149	12	708	580 B B	Grand Cherokee, Sorento, Tundra
245/70R17	110T	SL	BSL	480060855	240847	6.5 - 8.0	7.00	9.8	30.6	2337	12	683	580 B B	Silverado, Traverse, Durango, F-150, Sierra, Grand Cherokee
245/75R16	1118	SL	OWL	480128856	240557	6.5 - 8.0	7.00	9.8	30.5	2403	12	685	580 B B	Tahoe, RAM 1500, Ranger, Pathfinder, Tacoma
255/70R16	1118	SL	OWL	480127856	240848	6.5 - 8.5	7.50	10.2	30.1	2403	12	694	580 B B	Expedition, Explorer, F-150, Ranger
255/70R17	112T	SL	OWL	480067856	240849	6.5 - 8.5	7.50	10.2	31.1	2469	12	672	580 B B	Silverado, Sierra, F-150
255/70R18	113T	SL	OWL	480074856	240850	6.5 - 8.5	7.50	10.2	32.1	2535	12	651	580 B B	Wrangler, Tundra, Gladiator, Expedition
265/60R18	110T	SL	OWL	480076856	242489	7.5 - 9.5	8.00	10.7	30.5	2337	12	685	580 B B	Cherokee, F-150, Colorado
265/65R17	112T	SL	OWL	480061856	240851	7.5 - 9.5	8.00	10.7	30.6	2469	12	683	580 B B	Ranger, 4Runner, Tacoma
265/65R18	114T	SL	OWL	480068856	240852	7.5 - 9.5	8.00	10.7	31.5	2601	12	663	580 B B	Tahoe, Suburban, Silverado, Explorer, Yukon, Sierra
265/70R16	112T	SL	OWL	480045856	240853	7.0 - 9.0	8.00	10.7	30.6	2469	12	683	580 B B	Suburban, Tahoe, Colorado, Xterra, Frontier, Tundra, Tacoma, 4Runner
265/70R17	115T	SL	OWL	480042856	240556	7.0 - 9.0	8.00	10.7	31.7	2679	12	659	580 B B	Silverado, Tahoe, F-150, Sierra, RAM 1500, 4Runner
265/70R18	116T	SL	OWL	480070856	240854	7.0 - 9.0	8.00	10.7	32.6	2756	12	641	580 B B	Armada, Titan
265/75R16	116T	SL	OWL	480057856	240855	7.0 - 9.0	7.50	10.5	31.7	2756	12	659	580 B B	Silverado
275/55R20	113T	SL	BSL	480065855	240856	7.5 - 9.5	8.50	11.2	31.9	2535	12	655	580 B B	Suburban, Tahoe, Silverado, F-150, Yukon, Sierra, RAM 1500, Tundra
285/45R22	114H	XL	BSL	480176855	240857	9.5 - 10.5	9.50	11.2	32.1	2601	12	651	580 B B	Escalade, Tahoe, Expedition, Yukon, Navigator, RAM 1500
LT215/85R16	115R	Е	BSL	481233855	240858	5.5 - 7.0	6.00	8.6	30.5	2680	16	682		Silverado, F-350, Sprinter
LT225/65R17	107S	D	BSL	481267855	240875	6.0 - 8.0	6.50	8.9	28.5	2150	15	733		Sprinter
LT225/75R16	115R	E	BSL	481748855	240859	6.0 - 7.0	6.00	8.8	29.3	2680	15	710		Express, RAM ProMaster, Econoline
LT235/80R17	120R	E	BSL	481235855	240860	6.0 - 7.5	6.50	9.3	31.8	3085	15	654		Silverado, RAM 2500, Sierra
LT235/85R16	120R	E	BSL	481745855	240861	6.0 - 7.5	6.50	9.3	31.7	3042	15	656		F-250, F-350
LT245/70R17	1198	E	BSL	481120855	240862	6.5 - 8.0	7.00	9.8	30.6	3000	15	680		Silverado, F-150
LT245/75R16	120S	E	BSL	481103855	240863	6.5 - 8.0	7.00	9.8	30.5	3042	15	682		F-150, Econoline, Savana, Sierra, Sprinter
LT245/75R17	1218	E	BSL	481104855	240864	6.5 - 7.5	7.00	9.8	31.5	3195	15	660		Silverado, F-150, Titan
LT265/60R20	121R	E	BSL	481097855	240868	7.5 - 9.5	8.00	10.7	32.5	3195	15	643		Silverado, Sierra, Titan
LT265/70R17	1218	E	BSL	481535855	240865	7.0 - 8.5	8.00	10.7	31.7	3195	15	656		Silverado, F-250, Sierra, RAM 1500, 2500
LT265/70R18	124S	E	OWL	481014856	240866	7.0 - 9.0	8.00	10.7	32.6	3525	15	638		Silverado, F-150, Sierra
LT265/75R16	123R	E	OWL	481746856	242426	7.0 - 8.0	7.50	10.5	31.7	3415	15	656		Silverado, F-150, Sierra, FJ Cruiser
LT275/65R18	123S	E	OWL	481965856	240870	7.5 - 9.0	8.00	11	32.1	3415	15	648		Silverado, F-150, F-250, Sierra, RAM 1500
LT275/70R18	125R	E	OWL	481139856	240867	7.0 - 8.5	8.00	11	33.2	3640	15	627		Silverado, F-250, Sierra, RAM 1500, 2500
LT285/70R17	121R	E	OWL	481096856	240871	7.5 - 9.0	8.50	11.5	33.0	3195	15	630		Bronco, Gladiator, Wrangler, RAM 1500, RAM 2500
LT285/75R16	126R	Ε	OWL	481585856	240872	7.5 - 9.0	8.00	11.3	33.1	3750	15	628		H3

® POPULAR FITMENTS

- Chevrolet Silverado
- Chevrolet Suburban
- Chevrolet Tahoe
- GMC Sierra
- GMC Yukon
- Ford F-150
- Nissan Titan
- RAM 1500

PLUS-SIZING DISCLAIMER WARNING: Before you replace tires, always consult the vehicle owner's manual and follow the vehicle manufacturer's replacement tire recommendations. Vehicle handling may be significantly affected by a change in tire size or type. When selecting tires that are different from the Original Equipment size, see a professional installer in order to make certain that proper clearance, load-carrying capacity and inflation pressure are selected. Never exceed the maximum load capacity and inflation pressure is esclected. Never exceed the maximum load capacity and inflation pressure listed on the sidewall of the tire. Always drive safely and obey all traffic laws. Avoid sudden, sharp turns or lane changes. Failure to follow this warning may result in loss of control of the vehicle, leading to an accident and serious injury or death.







GET THE <u>RIGHT</u> TIRES FOR THE <u>RIGHT</u> APPLICATION AND FOR THE <u>RIGHT</u> SEASON



WRANGLER FORTITUDE HT

STRENGTH TO TACKLE THE DEMANDS OF YOUR DAY, EVERY DAY

WRANGLER WORKHORSE AT ®

THE TOUGHNESS TO TAME THE TERRAIN



OPTIMIZE FOR THE LONG-HAUL



The massive proliferation of e-commerce has made final-mile delivery vans operated by carriers such as FedEx, DHL and Amazon a common sight in most US neighborhoods.

- Registered vehicles topped 1.4M IN 2019[†]
- Last-mile fleets serviced 21% MORE STOPS IN '20^{††} than '19
- 4th Quarter 2020 was the **STRONGEST**^{††} in the history of last-mile delivery segment
- Last-mile delivery **70% OF MEDIUM DUTYFREIGHT**^{†††} market and growing steadily



Cargo van manufacturers take advantage as the last-mile delivery industry grows:

- 235/65R16C #1 Replacement size in 2022 based on Vehicles in Operation (VIO);
 11% CAGR from 2021 to 2025[†]
- 235/65R16C #1 Original Equipment size from 2022 2026; 6% CAGR through 2026[†]
- Original Equipment Fitments:
 - Continental VanContact A/S
 - Hankook DynaPro HT RH12



- Reinforced construction stands up to the stress of heavy loads
- Optimized tread design helps deliver quiet and comfortable ride
- Durable tread compound extends treadlife, OVER 30% MORE MILES-TO-REMOVAL than competition^{††††}
- Full-depth sipes and biting edges provide enhanced snow traction
- Four deep agua grooves helps protect against hydroplaning
 - SIGNIFICANTLY OUTPERFORMS in wet traction 20pmh^{†††††}
 - **OUTPERFORMS** in wet traction at 60mph^{†††††}



- Tread compound built to handle tough conditions while resisting chipping and chunking
- Unique tread pattern helps tire wear evenly and perform quietly on various road surfaces
- Numerous biting edges among with specialized tread compound provides enhanced winter traction; SEVERE SNOW CERTIFIED
- Large tread blocks combined with open grooves and sawtooth edges helps to provide improved off-road capability

† Based on IHS / †† The Age of Amazon: Why 3PL's and Last-Mile Delivery Fleets Draw Closer (June 25th, 2021) - Supply Chain Management Review (www.scmr.com) / ††† FTR Medium Duty Annual Ton Miles (Short Haul 2006 - 2025) / †††† Based on average projected miles to removal in fleet treadwear testing using tire size 235/65R16C 121R on 2016 and 2018 Ford Transit 250 cargo vans loaded to 8,716 pounds versus the following specified competitors. Average projected miles to removal: Goodyear® Wrangler Fortitude HT®: 37,925; Firestone® Transforce™ CV: 25,948; Continental® VancoFourSeason™: 28,459. Actual results may vary. / †††† Based on internal testing comparing Goodyear Wrangler Fortitude HT to Continental VancoFourSeasons 235/65R16C (Light Truck Trailer Traction). Actual on road results may vary.

PLUS-SIZING DISCLAIMER WARNING: Before you replace tires, always consult the vehicle owner's manual and follow the vehicle manufacturer's replacement tire recommendations. Vehicle handling may be significantly affected by a change in tire size or type. When selecting tires that are different from the Original Equipment size, see a professional installer in order to make certain that proper clearance, load-carrying capacity and inflation pressure are selected. Never exceed the maximum oad capacity and inflation pressure listed on the sidewall of the tire. Always drive safely and obey all traffic laws. Avoid sudden, sharp turns or lane changes. Failure to follow this warning may result in loss of control of the vehicle, leading to an





ENDURANCE®

TOW WITH CONFIDENCE

HAUL STRONG

Carry heavy-duty loads with a redesigned polyester construction reinforced with steel belts.

KEEP COOL

Operate at lower temperatures when properly inflated with an optimized tread depth and a decoupling groove.

STAY THE COURSE

Track straight for a smooth drive with an enhanced tread pattern.

AVOID DISRUPTIONS

Minimize air loss while towing with an enhanced inner liner.

PROTECT YOUR INVESTMENT

Defend against sidewall scuffs and punctures with Durawall® Technology and a scuff guard.



Maximum Speed 140 km/h







ENDURANCE® AVAILABLE SIZES

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX Load (LBS)	TREAD DEPTH (IN 32 ^{nds})	REVS/ MILE
ST205/75R14	105N	D	BSW	724864519	232865	5.0 - 6.5	5.5	8	26.1	2,040	8	797
ST215/75R14	108N	D	BSW	724865519	232866	5.5 - 7.0	6	8.5	26.7	2,200	8	779
ST205/75R15	107N	D	BSW	724861519	232551	5.0 - 6.5	5.5	8	27.1	2,150	8	768
ST225/75R15	117N	Ε	BSW	724857519	231946	6.0 - 7.0	6	8.7	28.3	2,830	8	735
ST235/80R16	123N	E	BSW	724858519	231947	6.0 - 7.5	6.5	9.3	30.8	3,420	8	675
ST235/85R16	125N	E	BSW	724860519	231948	6.0 - 7.5	6.5	9.3	31.7	3,640	8	659
ST255/85R16	129N	Е	BSW	724862519	231949	6.5 - 8.0	7	10	33.1	4,080	8	631

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

OPPULAR FITMENTS

- Travel trailers
- Car haulers
- Utility trailers
- Equipment trailers
- Watercraft trailers
- Livestock trailers
- Towable RVs



For more complete information, go to Tire-HQ™ at www.tire-hq.com. ©2019 The Goodyear Tire & Rubber Company. All rights reserved.




GOODYEAR® COMMERCIAL TIRE PRODUCT APPLICATION GUIDE







REGIONAL/URBAN

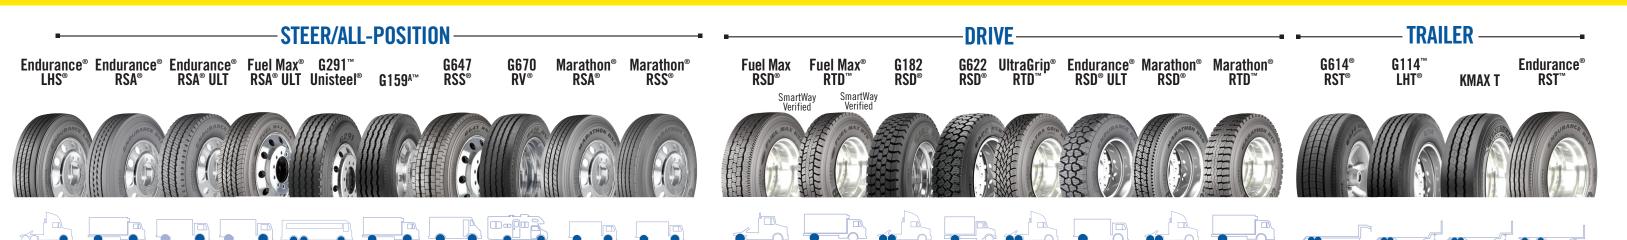

MIXED SERVICE



*Available with or without DuraSeal Technology®

Optional 🔵



LONG HAUL					
	TREAD	SIZE	LOAD RANGE	FUEL EFFICIENCY LEVEL	TREAD DEPTH (IN 32NDS)
		11R22.5	G, H	SmartWay® & GHG 2	18
		295/75R22.5	G, H	SmartWay & GHG 2	18
	Endurance® LHS®	11R24.5	G, H	Both Smartway, LR H Only GHG2	18
Steer/All-Position		285/75R24.5	G, H	Both Smartway, LR H Only GHG2	18
		11R22.5	G, H	SmartWay	18
	Marathon® LHS®	295/75R22.5	G, H	SmartWay	18
	Matation, rus,	11R24.5	G, H	SmartWay	18
		285/75R24.5	G	SmartWay	18
		11R22.5	G, H	SmartWay	30
	Endurance® LHD®	295/75R22.5	G	SmartWay & GHG 2	30
	Elianialice, Fun.	11R24.5	G, H	SmartWay	30
		285/75R24.5	G	SmartWay	30
	G572 1AD® Fuel Max®	11R22.5	G	SmartWay & GHG 2	24
	G372 TAD FUEL Max	295/75R22.5	G	SmartWay & GHG 2	24
Drive	Fuel Max LHD® 2	11R22.5	G	SmartWay & GHG 2	24
		295/75R22.5	G	SmartWay & GHG 2	24
	Fuel Max SSD® DuraSeal™	445/50R22.5	L,	SmartWay & GHG 2	24
		11R22.5	G	SmartWay	24
	Marathon® LHD®	295/75R22.5	G	SmartWay	24
	Marathon- Lun-	11R24.5	G, H	SmartWay	24
		285/75R24.5	G	SmartWay	24
	Fuel Max® LHT®	295/75R22.5	G	SmartWay	12
	Fuel Max SST® DuraSeal™	445/50R22.5	L	SmartWay	12
		11R22.5	G	SmartWay	12
		255/70R22.5	Н	SmartWay	13
	G316® LHT™ Fuel Max™	275/70R22.5	J	SmartWay	14
	G310, FULL LUGLIMAX	295/75R22.5	G	SmartWay	12
Trailer		11R24.5	G	SmartWay	12
II allel	G316® LHT™ Fuel Max™ DuraSeal	285/75R24.5	G	SmartWay	12
		11R22.5	G	SmartWay	12
		295/75R22.5	G	SmartWay	12
		11R22.5	G	SmartWay	12
	Marathon® LHT®	295/75R22.5	G	SmartWay	12
	INIGI GLIIVII - LTII -	11R24.5	G	SmartWay	12
		285/75R24.5	G	SmartWay	12

NEGIUNAL/	URBAN				
	TREAD	SIZE	LOAD RANGE	FUEL EFFICIENCY LEVEL	TREAD DEPTH (IN 32NDS
		11R22.5	G, H	SmartWay & GHG 2	18
	Endurance LHS	295/75R22.5	G, H	SmartWay & GHG 2	18
	Endurance Ene	11R24.5	G, H	Both Smartway, LR H Only GHG2	18
		285/75R24.5	G, H	Both Smartway, LR H Only GHG2	18
		225/70R19.5 245/70R19.5	G	GHG 2 GHG 2	17 18
		10R22.5	G	GHG 2	21
		11R22.5	G,H	GHG	22
		12R22.5	H	GHG 2	22
	Endurance® RSA®	245/75R22.5	G	GHG	19
		255/70R22.5	H	GHG 2	18
		265/75R22.5	G	GHG	20
		275/70R22.5	J	GHG 2	19
		295/75R22.5	G	GHG	22
		11R24.5	G,H	GHG	22
		LT215/85R16	E	-	14
	Endurance® RSA® ULT	LT225/75R16	E	-	14
		LT245/75R16	E	-	15
	Fuel Max® RSA® ULT	225/70R19.5 245/70R19.5	G H	GHG 2 GHG 2	16 16
	G291™ Unisteel®	315/80R22.5	J,L	GHG 2	18
	G159 ^{A™}	265/70R19.5	G	GHG 2	16
	d133	8R19.5	F	unu z	13
teer/All-Position	G647 RSS®	225/70R19.5	F,G	_	16
		245/70R19.5	G	GHG	16
		225/70R19.5	F	GHG	13
		245/70R19.5	G	GHG	13
		245/75R22.5	G	GHG	14
		255/70R22.5	Н	GHG	14
	G670 RV®	265/75R22.5	G	GHG	14
		275/70R22.5	Н	GHG	14
		275/80R22.5	Н	GHG	18
		295/80R22.5 315/80R22.5	H L	GHG —	16 16
		10R22.5	G	_	21
		11R22.5	H	_	22
		12R22.5	H	_	22
	Marathon® RSA®	255/70R22.5	H	_	18
	marathon Nov	295/75R22.5	G	_	22
		11R24.5	Н	-	22
		285/75R24.5	G	_	22
		11R22.5	Н	-	18
		255/70R22.5	Н	-	15
	Marathon® RSS®	295/75R22.5	G	-	18
		11R24.5	Н	-	18
		285/75R24.5 11R22.5	G	_ SmartWay	17 24
	Fuel Max® RSD®	11R22.5	H	SmartWay	24
	Tuer Max 1130	295/75R22.5	G	SmartWay	24
		225/70R19.5	G	GHG 2	18
		245/70R19.5	Н	GHG 2	19
	Fuel Max® RTD™	11R22.5	G,H	SmartWay & GHG 2	27
		255/70R22.5	Н	GHG 2	25
		295/75R22.5	G	SmartWay & GHG 2	27
		11R22.5	G,H	_	28
	G182 RSD®	12R22.5	Н	-	28
	220200	295/75R22.5	G	-	28
		11R24.5	G,H	_	28
		225/70R19.5 245/70R19.5	F,G		19
		10R22.5	G	_	20
		11R22.5	G,H	_	26
Drive	0000 000 -	12R22.5	Н	_	26
	G622 RSD®	245/75R22.5	G	-	23
		255/70R22.5	Н	-	23
		265/75R22.5	G	-	23
		295/75R22.5	G	-	26
		11R24.5	G	-	26
	UltraGrip® RTD™	11R22.5	G,H	-	25
	Endurance® DCD® III T	LT215/85R16	E	_	16
	Endurance® RSD® ULT	LT225/75R16 LT245/75R16	E E		16 16
		11R22.5	H	_	28
		295/75R22.5	G	_	28
	Marathon® RSD®	11R24.5	Н	_	28
		285/75R24.5	G	_	28
	Marathan® DTD™	11R22.5	Н	-	27
	Marathon® RTD™	295/75R22.5	Н	-	28
	G614® RST®	LT235/85R16	G	-	12
	G114™ LHT®	10R17.5	Н	-	14
	OTTA FULL	215/75R17.5	Н	-	16
_	KMax T	235/75R17.5	J	-	14
Trailer	Tunux I	245/70R17.5	J	-	14
		11R22.5	H	_	18
	ENDURANCE RST®	295/75R22.5	Н	_	18
		11R24.5 285/75R24.5	H	_	18
		203//31\24.3	п	_	18

MIXED SEF	TREAD	SIZE	LOAD RANGE	FUEL EFFICIENCY LEVEL	TREAD DEPTH (IN 3
	Endurance® WHA®	315/80R22.5	LUAD KANGE	GHG 2	24
	Endurance® WHA® DuraSeal™	315/80R22.5	L	GHG 2	24
	G289® WHA®	315/80R22.5	L	GHG	24
	G289® WHA® DuraSeal™	315/80R22.5	L	GHG	24
	GZOJ- WHA- DUI aSeal	11R22.5	Н	GHG	24
	G731™ MSA	12R22.5	Н	GHG	24
	G/31 W3A		H		24
	C721™ MCA DuraCaal	11R24.5		GHG	
	G731™ MSA DuraSeal	11R22.5	Н	GHG	24
		11R22.5	Н	GHG	24
	O7F1TM MACA	12R22.5	Н	GHG	24
	G751™ MSA	315/80R22.5	L	GHG	24
All-Position		11R24.5	H	GHG	24
		12R24.5	Н	-	24
	G751™ MSA DuraSeal	11R22.5	H	GHG	24
		315/80R22.5	L	GHG	24
	0000 11010	255/70R22.5	Н	GHG	22
	G288 MSA®	275/70R22.5	Н	GHG	23
		12.00R24	J	GHG	25
	G288 MSA® DuraSeal	11R24.5	Н	GHG	25
		11R22.5	Н	GHG	22
		315/80R22.5	L	GHG	23
	Workhorse® MSA	11R24.5	Н	GHG	22
		12R22.5	Н	GHG	22
		12R24.5	Н	GHG	22
		11R22.5	Н	-	28
	G282 MSD®	12R22.5	Н	-	28
		11R24.5	Н	-	28
	Armor Max®	11R22.5	Н	GHG 2	32
	Pro Grade MSD®	12R22.5	Н	GHG 2	33
		11R24.5	Н	GHG 2	32
	Armor Max®	11R22.5	Н	GHG 2	32
	Pro Grade MSD® DuraSeal	11R24.5	Н	GHG 2	32
Drive		11.00R20	Н	-	33
51110	G177 Unisteel®	12.00R24	J	-	40
	di// omsteer	12.00R24 OTR	J	-	40
		12R24.5	Н	-	33
	G741® MSD®	11R22.5	Н	-	33
	U/41 MOD	11R24.5	Н	-	33
	G971™ Armor Max®	LT215/85R16	E	_	17
	d3/1 Aillioi Wax	LT235/85R16	E	-	18
	Workhorse® MSD®	11R22.5	Н	-	31
	WOLKHOLSE MISD	11R24.5	Н	_	31
	ArmorMax® MSA	425/65R22.5	L	GHG 2	23
	ArmorMax® MSA DuraSeal™	425/65R22.5	L	GHG 2	23
		385/65R22.5	J	GHG 2	23
	G296® MSA	425/65R22.5	L	GHG 2	23
		445/65R22.5	L	GHG 2	23
Super Single	G296® MSA DuraSeal™	425/65R22.5	L	GHG 2	23
	G296® WHA®	425/65R22.5	L	GHG	23
	G296® WHA® DuraSeal™	425/65R22.5	L	GHG	23
		385/65R22.5	J	GHG 2	30
	G278 MSD®	425/65R22.5	L	GHG 2	30
		445/65R22.5	L	GHG 2	30







KEEP YOUR FLEET AT THE HEAD OF THE CLASS

GOODYEAR® SCHOOL BUS TIRES CAN HELP YOU SAVE MONEY.





STEER TIRES



GOODYEAR ENDURANCE RSA

THE TOUGHNESS FLEETS NEED FOR REGIONAL AND URBAN APPLICATIONS

Goodyear's premium offering with latest technologies, a 22/32" tread for long miles to removal and a seven-year casing warranty*

*Exclusions apply: See full warranty on goodyeartrucktires.com for specific details.



GOODYEAR MARATHON RSA

VERSATILE ALL-POSITION TIRE FOR REGIONAL AND URBAN APPLICATIONS

Goodyear's value offering with 22/32" tread depth for long miles to removal and a six-year casing warranty*

*Exclusions apply: See full warranty on goodyeartrucktires.com for specific details.



GOODYEAR MARATHON RSS

TOUGH ALL-POSITION TIRE ENGINEERED FOR STEER AND TRAILER POSITIONS IN REGIONAL AND URBAN APPLICATIONS

Goodyear's value offering with 18/32" tread depth for long miles to removal and retreadability

DRIVE TIRES



GOODYEAR G622 RSD®

FOR REGIONAL AND LOCAL HIGH-SCRUB APPLICATIONS

Goodyear's premium offering with an aggressive open shoulder tread design for all-season traction and a 26/32" tread for long miles to removal



GOODYEAR G182 RSD®

ALL-AROUND TIRE FOR REGIONAL SERVICE

Goodyear's premium offering with a deep 28/32" tread for long miles to removal and an open tread design for all-season traction



GOODYEAR MARATHON RSD

A LONG-LASTING, VERSATILE DRIVE TIRE FOR LONG HAUL, REGIONAL AND URBAN ROUTES

Goodyear's value offering with 28/32" tread depth for long miles to removal and a solid shoulder tread pattern for even wear

DRIVE RETREADS



GOODYEAR G622®

FOR REGIONAL AND LOCAL APPLICATIONS

Goodyear's premium retread with aggressive open shoulder tread design for all-season traction and a 26/32" tread for long miles to removal



GOODYEAR G167

HIGH-MILEAGE TREAD FOR MULTIPLE APPLICATIONS

Goodyear's value retread with a 22/32" tread and an open shoulder design balancing long miles to removal and all-season traction



GOODYEAR RDA

EFFECTIVE DRIVE RETREAD FOR ENHANCED TRACTION

Goodyear's value retread with a 22/32" tread and an aggressive open shoulder tread design for all-season traction





Trusted Products

Innovative Products for Any Fleet Application



Nationwide Dealer Network

2,300+ Dealers in North America Ready to Help Your Fleet



Reliable Services

Most Reliable Nationwide Roadside Service in the Industry*



Fleet Management Tools

Tire and Retread Tracking and Fleet Dashboard

Find your total solution at **goodyeartrucktires.com**.

*Fleet research study, Nov. 2015, Lieberman Research Worldwide. 590-fleet sample. Goodyear Dealer network roadside service compared to Michelin, Bridgestone and Continental.





DURASEAL

TECHNOLOGY

FOR LONG MILES TO REMOVAL








Endurance WHA Features & Benefits:


- **Dual-layer tread compound** helps optimize treadwear and rolling resistance
 - New high scrub-resistant tread compound for long tread life
 - Base compound engineered for lower rolling resistance compared to the Goodyear G289 WHA
- Deep 24/32" skid depth for long tread life in waste haul applications
- ☐ Steel belt and casing package help improve toughness and endurance, offering improved ROI, retread after retread
- Optimized shoulder design helps direct pressure away from the outer tread to promote uniform treadwear
- Built-in DuraSeal Technology helps seal tread punctures* to help keep trucks up-and-running and reduce replacement costs
- Four wide circumferential grooves help deliver all-season traction on wet, snowy or dry roads in stop/start waste haul applications
- Retread tread pattern optimized to meet the demands of the Drive wheel position
 - More rubber in the center to resist severe drive torque
 - Rounded shoulders optimize weight and resist scrub


Endurance WHA significantly outperforms the Bridgestone M860A in miles to removal**



Bridgestone M860A

Goodyear Endurance WHA



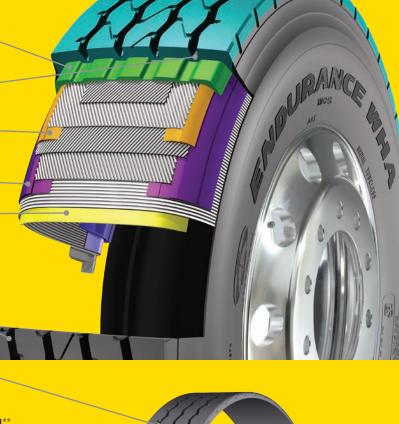





*Based on test data from waste haul focus fleets using side load, front load and rear load vehicles on the steer position. Actual results may vary.

Contains confidential and/or Proprietary Information. May not be copied or disseminated without the expressed written consent of The Goodyear Tire & Rubber Company

^{*}Seals up to 1/4" diameter punctures only in the repairable area of the tread. Does not seal sidewall punctures.

GOODYEAR WASTE HAUL LINEUP



Endurance WHA*

Goodyear's Best Waste Haul Tire For Long Miles To Removal.

- Dual-layer tread compound helps optimize treadwear and rolling resistance
- **Deep 24/32" skid depth** for long tread life in waste haul applications
- Steel belt and casing package help improve toughness and endurance, offering improved ROI, retread after retread
- **Built-in sealant** helps seal tread punctures** to reduce downtime and repair costs



G289 WHA*

Offers A 68 MPH Speed Rating And Helps Provide Outstanding Performance In Waste Haul Applications.

- Wider, deeper 24/32" tread for long-lasting tread life in waste haul applications
- Waste haul tread compound helps enhance scrub resistance
- **Distinct sidewall protector rib** helps resist sidewall scuffing in high-scrub waste haul applications to enhance casing life

Available Retreads: Goodyear UniCircle® G289 WHA, Goodyear Precure G289 WHA



*G751™ MSA**

Offers Toughness On The Road For Mixed-Service Applications.

- Higher-scrub tread compound and more wearable rubber help resist cuts, chips and tears and offer up to 50% more miles to removal than G287 MSA®
- **Wider footprint** for excellent stability and traction



Armor Max Pro Grade MSD*

Versatile, Long-Lasting Tire For Rugged Mixed Service Applications.

- Rugged tread design for excellent on- and off-road traction
- Tough, high-tear compound in the tread helps resist chips and chunks
- Mixed service undertread layer for enhanced casing toughness for hardworking applications
- **Built-in sealant** helps seal tread punctures** to reduce downtime and repair costs

Extend The Life Cycle Of Your Tires With These Innovative Retreads

With a wide selection of innovative waste haul truck retreads and services to back them up, your fleet can start saving today.



G686 PC

An All-Position Retread.

- Deep 26/32" tread depth helps provide many miles to removal
- Aggressive mixed service design offers toughness for running short distances



G289® WHA® PC

Rugged Toughness For Waste Haulers.

- **Rib design** for long treadwear in waste haul applications
- **Proprietary compound** helps extend casing life in challenging high-scrub conditions



Endurance™ WHD PC

More Miles For Waste Haulers.

- Deep 32/32" tread depth helps provide many miles to removal
- Waste haul compound helps scrub and cut resistance



Endurance™ WHA PC

Goodyear's Best Waste Haul Retread For Long Miles To Removal.

- Dual-layer tread compound helps optimize treadwear and rolling resistance
- Deep 26/32" skid depth for long-lasting tread life in waste haul applications



G177 PC

Rugged Toughness For Waste Haulers.

- Rugged tread design for excellent off-road traction
- Open shoulder design enhances self-cleaning capabilities

